



Reference diagram for MS-60A setup steps



Turn the switch to °C :
Degree centigrade
Turn the switch to °F :
Fahrenheit degree




Turn the switch to R to
active the cooling mode
Turn the switch to H to
active the heating mode



Press and hold “≡” for 3
seconds to enter the menu for
ES setting

ES is for temperature control
Short press the “+” key or
“-” key to adjust the ES
parameter

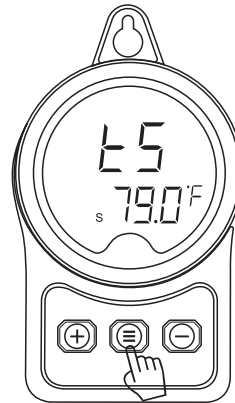


Short press “≡” to enter the
“HD” interface

HD represents Hysteresis temp
Short press the “+” key or
“-” key to adjust the HD
parameter




HA represents High
temperature alarm

Short press “≡” to enter the
“HA” interface

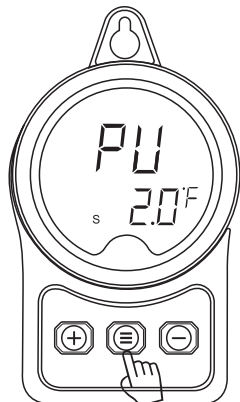

Short press “≡” to enter the
“PU” interface

PU represents Delay start

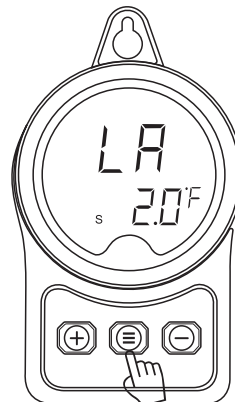

Short press “≡” to enter the
“LA” interface

LA represents Low temperature
alarm

